



FOR GENERAL REFERENCE ONLY  
Models shown may not match the model features or manuf year of the item offered by AERE.

## STANDARD FEATURES

### ⌘ HEAVY DUTY CONSTRUCTION

Top is made of solid 18" gauge stainless steel, including drip tray(s) for easy cleaning.  
Wear-resistant black vinyl exterior, galvanized interior with durable stainless steel floor, and coved corners.  
Drain is located in rear of cabinets to keep unit pristine at all times.  
Ecomate® insulation foamed in place.

### ⌘ POLISHED STAINLESS STEEL TOWERS

Draft towers are three inches in diameter, stainless steel with polyurethane insulation. The continuous flow of cold air throughout tower results in a perfect pour. Ecomate® insulation foamed in place.

### ⌘ CO2 GAS VALVE INCLUDED

### ⌘ STAY OPEN DOORS WITH LOCKS AND LIGHT

90° Stay open door feature and interior LED light underneath the mullion.

### ⌘ MAGNETIC GASKETS

Built of one piece, the gasket is removable without tools for ease of cleaning and replacement.

### ⌘ ENHANCED REFRIGERATION SYSTEM

Factory engineered oversized and balanced refrigeration system. CFC free R-134a refrigerators maintain temperature between 33°F to 38°F, keeping beers ice cold.

### ⌘ SIDE MOUNT COMPRESSOR & FRONT BREATHING

System allows easy service and unrestricted placement of the unit.

### ⌘ ANALOG THERMOSTAT

### ⌘ INTERCHANGE DOORS

Field interchangeable doors from Solid to Glass or Glass to Solid based on operator's needs.

### ⌘ GREATER USABLE INTERIOR CAPACITY

Evaporator located on left side above compressor providing a greater working interior capacity.

### ⌘ ADDC-23

Single keg units are rear breathing with internal drain, internal CO2 chain harness and with knockout place for external CO2 placement. Standard with 3" casters.

## OPTIONS & ACCESSORIES

Single / Double draft towers / 3" Rails Casters / 6" Adjustable stainless steel legs / Dunnage floor / 220v-50Hz-1Phase  
Stainless Steel Bar Equipment

## Direct Draw BEER COOLERS

- ❑ ADDC-23
- ❑ ADDC-58
- ❑ ADDC-68
- ❑ ADDC-78
- ❑ ADDC-94



ADDC-23



ADDC-68




ADDC-94



| MODEL             | DOORS | TOWERS | TAPS | BARRELS | AMPS | HP  | VOLTAGE  | NEMA PLUG | Cabinet Dimensions |         |         | Shipping |       |
|-------------------|-------|--------|------|---------|------|-----|----------|-----------|--------------------|---------|---------|----------|-------|
|                   |       |        |      |         |      |     |          |           | L                  | D*      | H       | Wt.      | Cubes |
| <b>SOLID DOOR</b> |       |        |      |         |      |     |          |           |                    |         |         |          |       |
| ADDC-23           | 1     | 1      | 1    | 1       | 2.5  | 1/6 | 115/60/1 | 5-15P     | 24 1/4"            | 30 1/2" | 40 1/8" | 165      | 23    |
| ADDC-58           | 2     | 2      | 3    | 3       | 6.6  | 1/3 | 115/60/1 | 5-15P     | 59 1/2"            | 28"     | 37"     | 314      | 51    |
| ADDC-68           | 2     | 2      | 3    | 3       | 6.6  | 1/3 | 115/60/1 | 5-15P     | 69 1/2"            | 28"     | 37"     | 370      | 59    |
| ADDC-78           | 3     | 2      | 4    | 4       | 6.9  | 1/3 | 115/20/1 | 5-15P     | 80"                | 28 1/2" | 36 3/4" | 396      | 68    |
| ADDC-94           | 3     | 2      | 4    | 5       | 7.2  | 1/3 | 115/60/1 | 5-15P     | 95 1/2"            | 28"     | 37"     | 409      | 81    |

\* Depth does not include 1" bumper



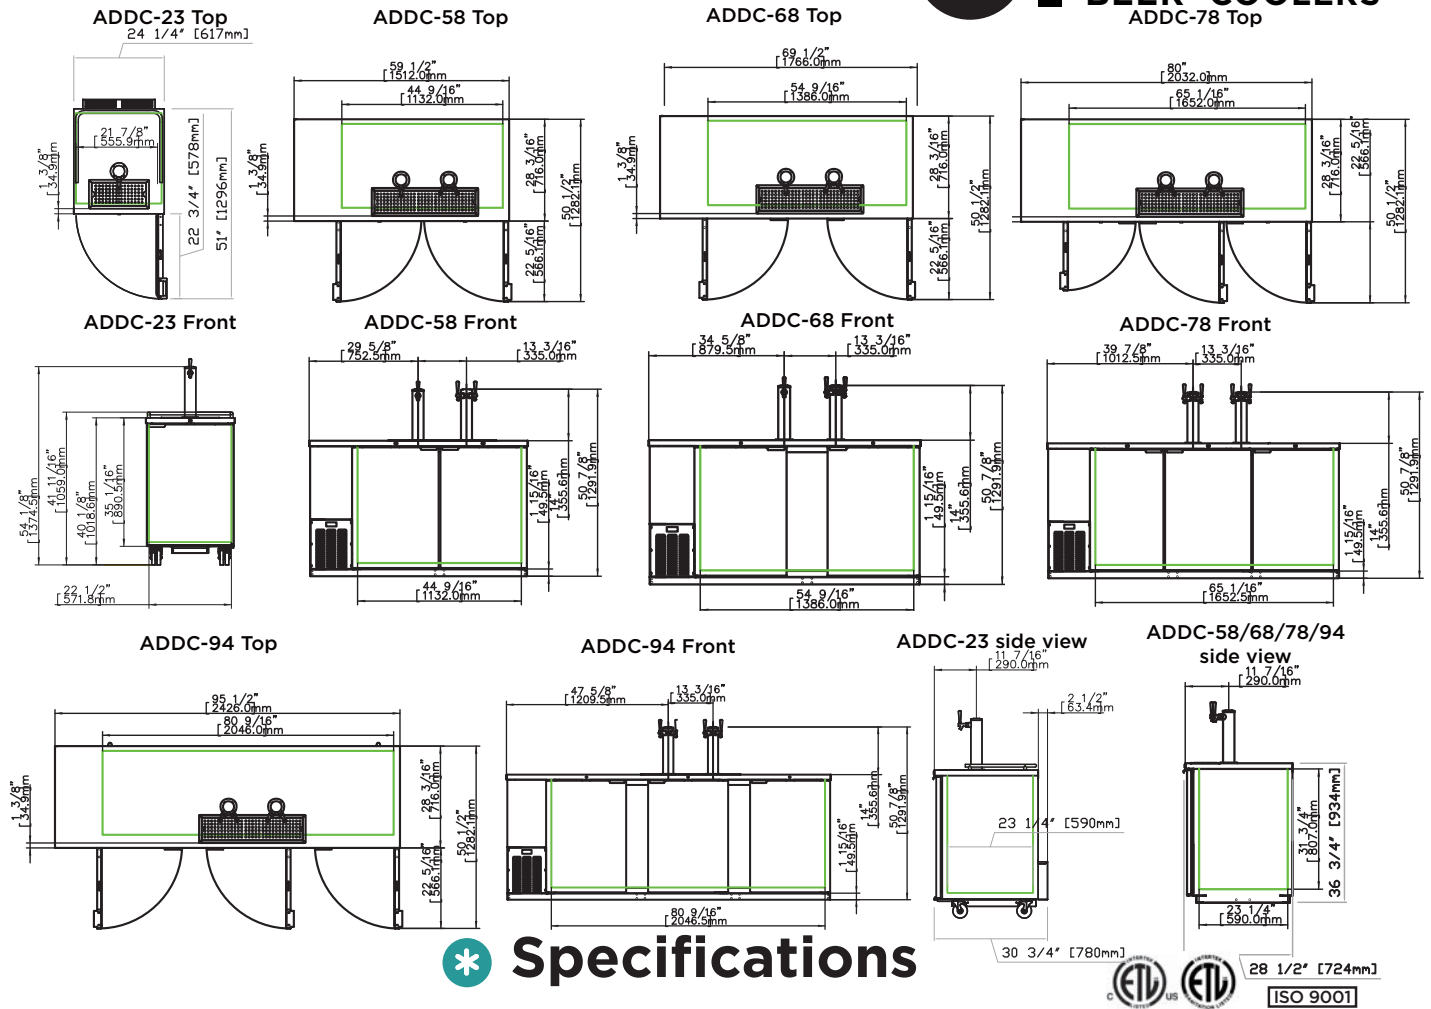

## ④ CONSTRUCTION

- 18 gauge stainless steel top and stylish black vinyl finish front, sides and back. Interior built of galvanized steel walls with covered corner stainless steel floor. Interior LED light.
- The entire cabinet has a 1-1/2" Ecomate® CFC-free, polyurethane insulation foamed-in-place.
- Field interchangeable doors with 90° stay open feature and locks standard. One piece magnetic gaskets for easy cleaning.
- ADDC-23 single keg units are rear breathing with internal drain, internal CO2 chain harness and with knockout place for external CO2 placement. Standard with 3" casters.
- Drain is located in the back, inside compressor housing.

## ④ REFRIGERATION SYSTEM

- Oversized and balanced refrigeration system.
- Self-contained capillary tube system using environmentally-friendly and CFC-free refrigerant, R-134a holding temperature at 33°F to 38°F refrigerators.
- Front breathing/side mount compressor for ease of service and placement in narrow spaces. Condensing unit is behind the front grill, slides out for easy access and maintenance.
- Forced air cooling system for faster cooling and constant temperature in the cabinet.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Analog thermostat.

## ④ ELECTRICAL

- The whole unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 115/60/1 phase.
- 220V/50Hz/1ph available from factory.

## ④ WARRANTY

- Continental USA & Canada:
- **One year** labor and parts warranty.
  - **Five year** compressor warranty.
  - **International:** one year parts only.

\* Asber's specifications are subject to change without notice as we continue to make product improvements.