

Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_



GLOBE FOOD EQUIPMENT COMPANY

Automatic Slicers

3850P/3975P



## 3850P/3975P Automatic Slicers

### Model

- 3850P - Two Speed Automatic Slicer
- 3975P - Nine Speed Automatic Slicer



Made in the U.S.A.



*Features a 13" PreciseEdge™ knife, a premium gear drive system, stainless steel construction, and Globe's exclusive EZ-Glide™ table.*

### Standard Features

- Exclusive stainless steel construction
- EZ-Glide™ adjustable slicing table
- 13" PreciseEdge™ hardened steel alloy knife
- Powerful 1/2 HP, 7 amp motor
- Premium gear-driven knife
- Maintenance-free drive system
- Built-in antimicrobial protection
- Precision gear slice thickness adjustment
- Open space base design
- Knife cover interlock
- Signature knife sharpening system
- Permanently attached knife ring guard
- Full gravity feed, 45° angle
- 3 lb. stainless steel endweight
- Unique dual arm lift lever
- Touch pad controls
- Power indicator light
- No voltage release

### Options and Accessories

- Quick-Clean™ proprietary nickel-based coating (knife cover and slice table)
- Front mounted endweight assembly
- Prison package
- High moisture application package (includes stainless steel knife)
- 15" long food chute
- Stainless steel knife
- Low food fence (12"L x 1-3/8"H)
- High food fence (12"L x 3"H)
- 10 lb. attachable portion control scale
- Vegetable hopper
- Clear plastic slicer cover

### Standard Warranty

- Two-years parts and one-year labor plus 15 years on the knife drive gears

Approved By: \_\_\_\_\_

Date: \_\_\_\_\_



**GLOBE FOOD EQUIPMENT COMPANY**

[www.globeslicers.com](http://www.globeslicers.com)

2153 Dryden Rd.  
Dayton, OH 45439  
Phone: 937-299-5493  
Phone: 800-347-5423  
Fax: 937-299-4147



# Automatic Slicers

# 3850P/3975P

## Specifications

**Finish:** Exclusive all stainless steel base with radiused corners improves sanitation and durability. Other stainless steel parts include the food chute, slicing table, endweight and knife cover.

**Knife Motor:** Powerful 1/2 HP, 7amp, 115/60/1.

**Chute Motor:** Two speed DC fractional horsepower 1 amp. Both motors have permanently lubricated sealed ball bearings.

**Knife Drive:** Cross axis helical gear drive design. This maintenance free drive design is continuously lubricated ensuring quiet operation and reliable cutting performance.

**Slice Thickness:** Precision dual gear design eliminates table movement during slicing. Consistently produces tissue thin slices with a maximum slice thickness of 1 1/4".

**Antimicrobial Protection:** Knobs and handles have antimicrobial protection built-in, which inhibits the growth of bacteria and provides superior sanitation.

**Full Gravity Feed:** Full 45° angle feed requires less mechanical pressure. Equipped with a 3 lb. stainless steel endweight to minimize waste and hold product. Food chute handle is ergonomically designed and the endweight swings away for storage behind the chute.

**Table:** EZ-Glide™ adjustable slicing table is designed to reduce surface friction, facilitating a smooth and easy slicing stroke.

**Dual Wheel Lift Lever:** A handle activates two large wheels, lifting the front of the unit to facilitate safe and easy cleaning underneath the slicer.

**Touch Pad Controls:** Start/stop touch pad controls activate the knife motor.

**Chute Speed:** Controlled by faster/slower touch pad controls.

**Knife Cover Interlock:** Slicer will not operate with knife cover removed.

**Knife Ring Guard:** Permanently mounted knife ring guard covers the non-slicing portion of the knife protecting the operator from the knife's edge.

**Top Mounted Sharpener:** Metal knife sharpener is permanently mounted on the slicer. A single lever activates the stones to quickly and easily return a razor sharp cutting edge.

**Hallow Ground Knife:** 13" diameter special hardened steel alloy knife with stain resistant finish and sanitary hub provides increased cutting capacity, clean cuts and effortless slicing. Knife's edge has a Rockwell hardness of 60-62.

**No Voltage Release:** Prevents inadvertent reactivation of the slicer in the event of a power or interlock interruption.

**Cutting Capacity:** Width 11.6" (29.5 cm), Height 9" (22.9 cm), Diameter 7.5" (19 cm)

**Power Indicator Light:** A readily visible red light illuminates when the knife is rotating.

**Automatic Chute:** Chute travels 40/60 (model 3850P) or 20-60 (model 3975P) strokes per minute utilizing a separate DC motor with a heavy duty permanently lubricated chain and sprocket drive system. Chute can be quickly engaged or disengaged for manual operation with the auto engage lever.

**Cord & Plug:** Attached 7 foot flexible 3 wire cord with molded plug fits a grounded receptacle.

### Dimensions:


Foot Print = 14" x 21.6"  
(35.6 cm x 54.9 cm)  
Overall Length = 26.2" (66.5 cm)  
Overall Width = 22" (55.9 cm)  
Overall Height = 25.2" (64 cm)  
Freight Class: 77.5  
Net Weight: 145 lbs. (67.1 kg)  
Shipping Weight: 172 lbs. (78 kg)  
Shipping Dimensions:  
28"W x 25"D x 34"H  
(71.1 cm x 63.5 cm x 86.4 cm)

### Factory Installed Options:

**Quick-Clean™** Quick-Clean™ proprietary nickel-based coating (knife cover and slicing table)  
**FMEW** Front mounted endweight  
**PRISON MEATROOM** High moisture application package  
**LONGCHUTE SSK** 15" long food chute  
Stainless steel knife

### Accessories:

**1326** High fence (12" x 3")  
**1047** Low fence (12" x 1 3/8")  
**873-SET PS13** 3" extension legs  
10 lb. attachable portion control scale  
**699-BAS SC-LARGE** Vegetable hopper  
Clear plastic slicer cover

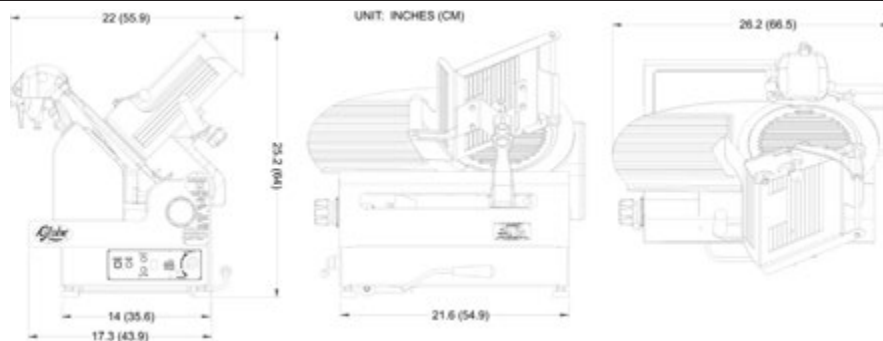

## GLOBE FOOD EQUIPMENT COMPANY

[www.globeslicers.com](http://www.globeslicers.com)

2153 Dryden Rd.  
Dayton, OH 45439  
Phone: 937-299-5493  
Phone: 800-347-5423  
Fax: 937-299-4147

Printed in U.S.A. 04-2010

Specifications are subject to change without notice.