HUSSMANN®

SHM

Self-Contained, Specialty Horizontal Medium Temperature Merchandiser FOR GENERAL REFERENCE ONLY Models shown may not match the model features or manuf year of the item offered by AERE.

Advanced Design

- Soft, round design featuring as standard a white base with black bumper
- All SHM merchandisers have the same contour and line up together to create extended product displays

Merchandising with Style

 Large volume three-step display insert brings the product to the customer and stimulates impulse sales throughout your store

Smart Construction

- Compact size offering maximum display area in minimum floor space
- Large front window and sides for increased product visibility
- CFC-free insulation
- Factory-installed power cord and on/off power switch
- Easy to clean interior


Innovative Refrigeration

- Air curtain design with efficient honeycomb air discharge
- Automatic defrost
- Electronic controls with digital display
- Electric condensate pan; no drain required
- Slide-out condensing unit for easy serviceability
- Adjustable temperature control
- Type II (80°F and 55% R.H.) certified




Model shown with optional 3-sided bumper kit.

SHM-3 and SHM-4 - Specialty Horizontal Merchandisers

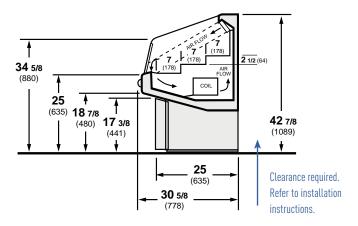

Plan View



Standard Features.

| - Color Exterior | White |
|-----------------------|-----------------|
| - Color Exterior Base | White |
| - Color Interior | White |
| - Bumper | Black |
| - Shelves | 3 -Step |
| - End Panel | View |
| - Power Cord | Yes (SHM-3, -4) |
| - NSF | Type II |
| - Air Discharge | Front |
| - Insulation | CFC-Free |
| - Leg Levelers | Yes |

Optional Accessories.

- Stainless steel exterior or choice of exterior colors.
- Wrap-around bumper.
- Wire racks and dividers.
- LED Light bar kit.
- Leg and caster kits.
- Integrated night cover.
- Skirt kit (use with leg kit).
- Plex product stop 2-inch high for lower step only.



NEMA 5-15R

SHM models have factory-installed power cords attached at the electrical box.

- Always use a dedicated circuit with the amperage stated on the unit.
- Plug into an outlet designed for the plug.
- Do not overload the circuit.
- Do not use long or thin extension cords; never use adapters.
- If in doubt, call an electrician

Specifications

| | | Exterior | | | | | Electrical | | | | | Approx. |
|----|-------|------------|---------|---------|------|---------|------------|-------|------|------|-------|----------|
| | | Dimensions | | | Nom. | | | | Run | Fuse | NEMA | Ship Wt. |
| M | odel | L | D | Н | HP | Refrig. | Hz/Ph | Volts | Amps | Amps | Plug | (lbs) |
| SI | HM-3 | 36" | 30-5/8" | 42-7/8" | 1/3 | R-404a | 60/1 | 115 | 10.3 | 15 | 5-15P | 250 |
| Sł | -{M-4 | 48" | 30-5/8" | 42-7/8" | 1/2 | R-134a | 60/1 | 115 | 9.5 | 15 | 5-15P | 350 |

Length dimensions are without optional bumpers.

SHM-3 Refrigeration load - 2300 BTU/h AC load - 3162 BTU/h SHM-4 Refrigeration load - 3535 BTU/h AC load - 4866 BTU/h

For all models, refrigeration load and AC load obtained at $20^{\rm o}$ F evaporation temperature and $110^{\rm o}$ F condensing temperature.



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.





NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 80°F and 55% R.H. Case is designed for holding pre-frozen product only.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources and warranties, contact your representative or visit www.hussmann.com.



Hussmann Corporation

12999 St. Charles Rock Rd. Bridgeton, MO 63044-2483 Ph: 314.291.2000